

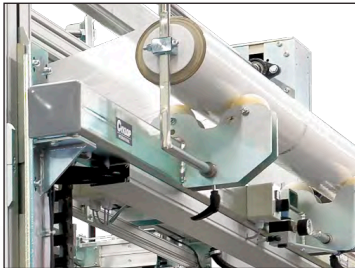


# Sheet Dispenser TF/ITF

Fully Automatic Sheet Dispenser

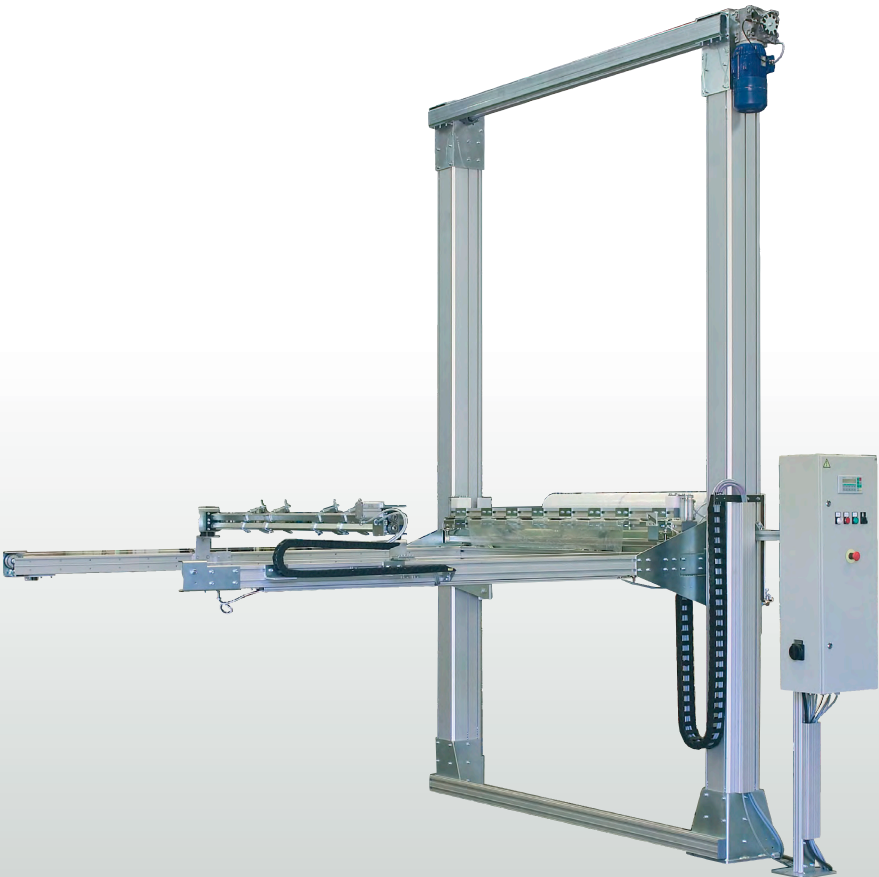

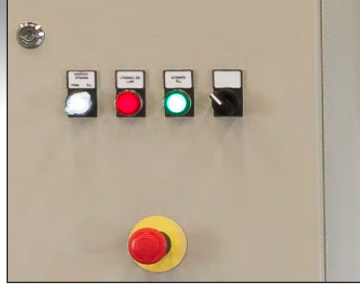

## Sheet Dispenser TF/ITF

Top sheet dispensers in fully automatic production line types TF or integrated into stretchwrapper GL 2000 type ITF.

For extra water protection, the production line can be fitted with equipment which, together with the Cyklop stretchwrapper GL 1000 or GL 2000, will also meet this requirement. The Cyklop top film dispenser TF is usually included in a fully automatic line next to a stretchwrapper when palletized goods need protection from dust or dampness on top. The machine is easy to fit and made of aluminium.

A programmable logic control system and frequency converters make the machine highly flexible and easy to customize. The top film dispenser ITF is fully integrated into the GL 2000 when it comes to electricity, pneumatics and programs.

### How does it work?

The arm pulls a sheet from the dispenser and applies it to the top of the palletized goods and once the goods have been stretch wrapped the top sheet is firmly wrapped in position.



GL 2000 with ITF

## Specification and dimensions TF/ITF

|                         |             |                          |
|-------------------------|-------------|--------------------------|
| <b>Capacity</b>         |             | Up to 60 pallets/hour    |
| <b>Film width</b>       |             | 1200-1600 mm             |
| <b>Roll diameter</b>    |             | Max. 200 mm              |
| <b>Top sheet length</b> |             | Max. 1800 mm             |
| <b>Power</b>            | Supply      | 3 x 400 V, 50 Hz, 0,4 kW |
|                         | Protection  | IP54                     |
| <b>Dimensions TF</b>    | Height      | 3651 mm (Std)            |
|                         | Length      | 3585 mm (Std)            |
|                         | Width       | 2460 mm (Std)            |
| <b>Dimensions ITF</b>   | Height      | 3651 mm (Std)            |
|                         | Length      | 3062 mm (Std)            |
|                         | Width       | 2410 mm (Std)            |
| <b>Pneumatics</b>       | Airpressure | 6 bar                    |
| CE-mark                 | (EN 60204)  |                          |

Crated dimensions standard machine: 4000 x 1500 x 2650 mm. Weight 500 kg.



GL 1000 with TF

**CYKLOP**  
INTERNATIONAL